

- Ext. communication to Host System
- A Feeder
- B Weighing System
- C Control Module
- D Operator Interface

Each Coperion K-Tron volumetric feeder consists of the components A, C and D.

Component A is specified here.

Application

Volumetric feeding of easy flowing powders, granules and other bulk materials.

Design

S500: Single-shaft feeder with interchangeable feeding tools and horizontal agitator to keep the bulk material in the storage hopper moving and ensure a reliable infeed.

S510: Single-shaft feeder with interchangeable feeding tools without horizontal agitator.

A variety of feeder screws allows for accommodation of various bulk materials. There are spiral- or auger feeder screws available with different diameters and with short or long pitches. Several feeder screws are equipped with shovels for better filling.

All parts in contact with the material being fed are stainless steel.

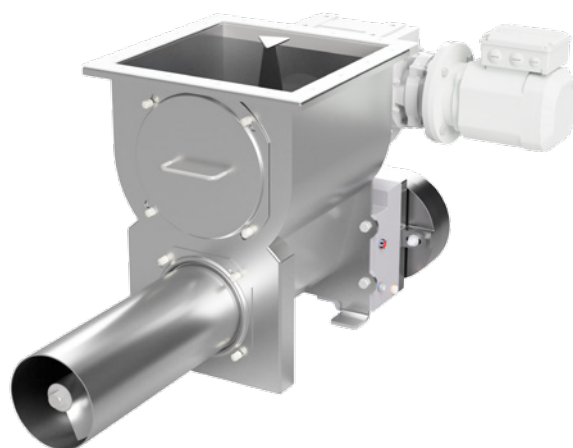
This equipment conforms to all applicable European Directives (e.g. Machinery, EMC).

Controller: (see separate data sheets)

The SmartConnex™ control system allows individual or multi-component control. Each feeder has its own control module. Connection between feeders, operator interface and smart I/O is via an industrial network. A variety of protocols is available for connection to the plant's host system.

Hazardous Location Options:

- NEC Class II, Div. 2, Groups F & G / Class II, Div. 1, Groups F & G
- Class I, Div. 2, Group D / Class I, Div. 1, Group D
- ATEX 3D/3D, 3D/2D, 3G/3G, 2G/2G, 2D/2D (outside/inside)








K-MV-S500

(The K-MV-S510 has no horizontal agitator)

Feed Screws and Feed Rates

Actual feeder screws are determined based on the material being fed.

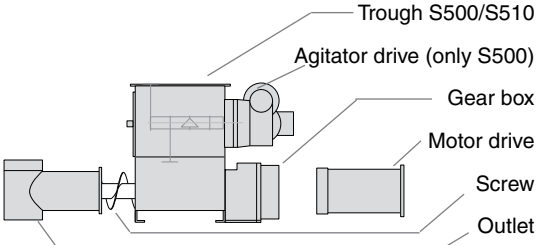
Attention: The following rates are theoretical values for free flowing materials being fed volumetrically. Actual feed rates depend on individual material characteristics. The feed range for loss-in-weight feeders is somewhat smaller. For feed rates at the upper or lower limits of the theoretical range, check with a Coperion K-Tron Test Lab.

Pitch	DN	Auger Screws			Spiral Screws			Max. screw speed
		 ø100	 ø130	 ø150	 ø100	 ø130	 ø150	
Coarse	dm³/h	140 - 14700	314 - 33060	430 - 45300	140 - 14700	314 - 33060	430 - 45300	400 RPM
	ft³/h	5 - 520	11 - 1168	15 - 1600	5 - 520	11 - 1168	15 - 1600	
Fine	dm³/h	70 - 7400	148 - 15560	200 - 21000				400 RPM
	ft³/h	2.5 - 261	5.2 - 549	7 - 742				

Feed rates shown are with servo motor and KCM controller (Max. motor speed 2000 RPM). For feed rates with DC or AC motors consult factory.

Coperion K-Tron Product Specification
Volumetric Single Screw Feeder

K-MV-S500
K-MV-S510

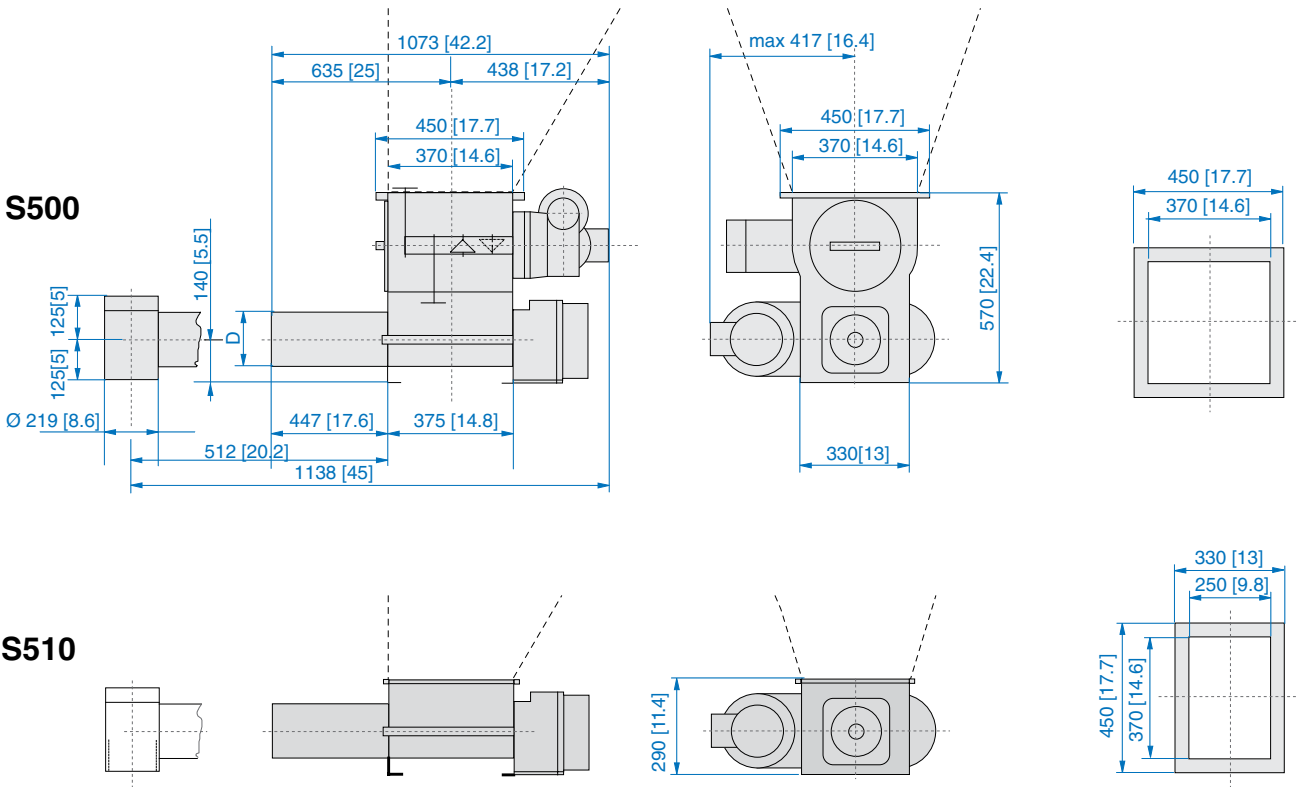
Configuration	Description	Alternatives	Remarks	Weight kg [lb]
		50 dm³ [1.8 ft³] / 15 dm³ [0.5 ft³]	Cleaning opening front side: Ø 240 [9.5]	S500: 134 [295] S510: 64 [141]
		EMEA/Asia: 230/400 VAC; 550 W; IP55 Americas: 230/460 VAC; 0.75 HP; IP55		
		Servo motor - 1.6 kW, 240 VAC, IP65 KCM-III requires 230 VAC single phase (US split-phase, 3 wire balanced, L1-N-L2)		
		Horiz. outlet Vertical outlet Pressure compensation	std.: vertical	

Materials:
Parts in contact
with bulk material: Stainless steel
 EN 1.4404 / 1.4435 (AISI 316L)

Seals: PTFE, Neoprene
Painting: Light gray RAL 7035

Temperature-Limits:
Ambient: 0 ... 40°C [32 ... 104°F]
Material: 0 ... 50°C [32 ... 122°F]
for other material temperatures contact factory

Dimensions mm [in]



Caution: these measurements are for general reference only. Please consult dimensional drawing for exact measurements

