


Two-Way Diverter Valve WRK




MASSIVE CAST-IRON DIVERTER VALVE FOR GRANULAR PRODUCTS AND POWDERS


- _ Wear-protected diverter valve for abrasive products
- _ For compact installation in conveying lines or gravity pipes up to 4 barg

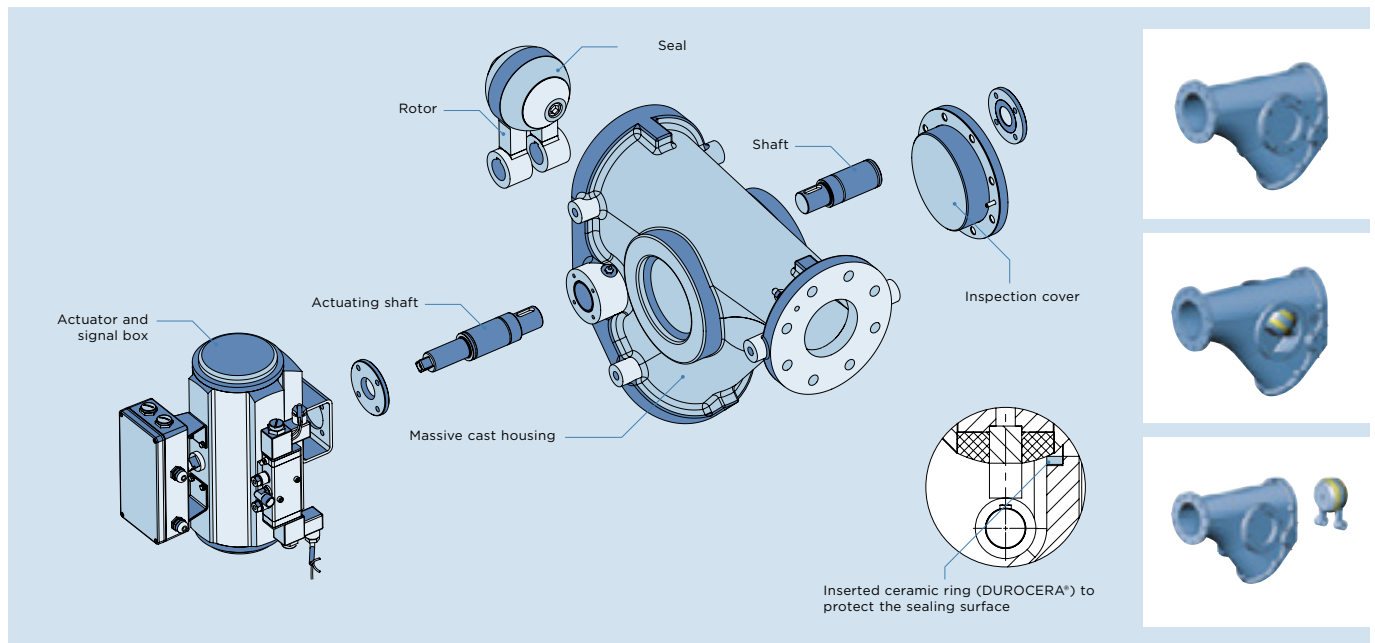

Straight through

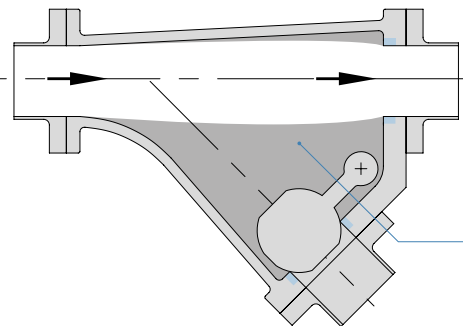


Diverted

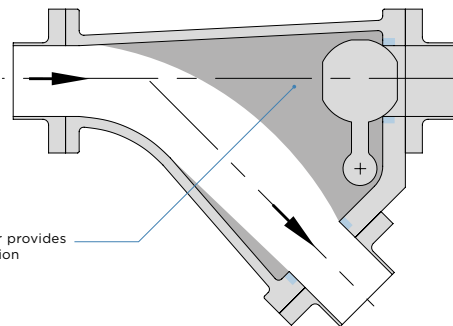

DIVERTER VALVE FOR GRANULAR PRODUCTS AND POWDERS | WRK

MAX. PRESSURE	4 barg (58 psi) system and differential pressure
OPERATION TEMPERATURE	-20 °C to 100 °C
APPLICATION	Suitable for fluid group 2 in accordance with PED (fluid group 1 upon request)
SEAL CONFIGURATION	Rotor with elastomer seal
MATERIAL	Cast iron with ceramic wear protection ring installed

OPTIONS AND ACCESSORIES
- Can be used in ex-zones with proper accessories - Second inspection cover - Switchable in the product (case-by-case assessment) - Actuator on the right-hand side

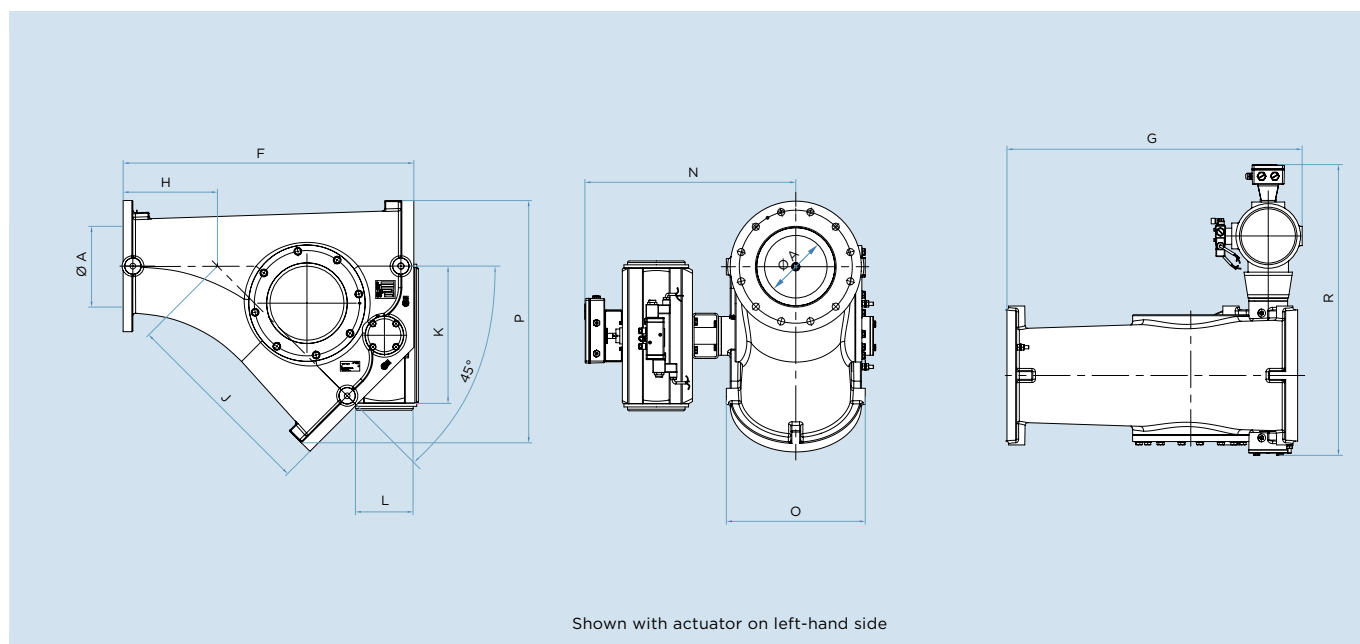

	Inlet*/Outlet*		Other dimensions										Weight (appr. kg)	
	A (DIN)	A (ASME)	Ø A	F	G	H	J	K	L	N	O	P	R	GG
WRK 100	DN 100	4"	100	520	515	132	388	274	114	443	270	470	607	120
WRK 125	DN 125	5"	125	600	605	147	453	320	133	493	290	537	670	150
WRK 150	DN 150	6"	150	700	708	202	498	352	146	523	320	595	719	180
WRK 200	DN 200	8"	200	770	762	242	528	373	155	588	370	666	810	230
WRK 250	DN 250	10"	250	900	949	292	608	430	178	694	430	777	942	330

Dimensions in mm

Other sizes upon request.

* Drilled according to DIN PN 10 with metric thread or ASME 16.5 class 150 with thread in inches.